


FlexWrap 60 Tape

For sealing details and penetrations in diffusion-open roofing underlay

Description :

Isola FlexWrap is a pre-compressed, flexible and self-adhesive butyl membrane for sealing penetrations in diffusion-open roofing underlay. The membrane can also be used to seal weather barriers under windowsill fittings in wall constructions. Isola FlexWrap consists of modified butyl adhesive and pre-compressed Tyvek® cloth.

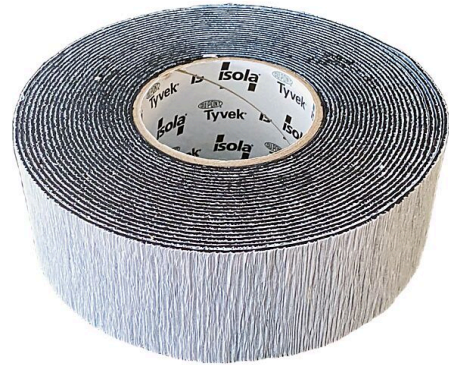

Application :

For sealing penetrations in diffusion-open roofing underlay. The membrane can also be used to seal weather barriers under windowsill fittings in wall constructions.

Storage :

Store in a dry place and frost-free (+5 to +25 °C) and protect from UV radiation

Approvals and guarantee

Installation :

The surface must be dry and clean – free of dust, oil, grease and solvents. When gluing to porous surfaces such as concrete, wood wool boards etc., first prime the substrate with a butyl or tape primer. Fit FlexWrap 228 to the windowsill before fitting the window in the wall. When working with chimneys and vent cowls, first glue the membrane to the penetration and then to the roofing underlay. Cut the membrane into four lengths with some overlap and fit it first to the front edge, then the side edges and finally to the rear edge of the penetration. See separate installation video/installation instructions.

For more details see laying instruction on our website.

Accessories for :

Isola FireCurb Soft 1,90x50m
Isola Tyvek® Soft Xtra
UV-Facade Vindsperre
Dampsp AirGuard Smart2 1,5x50m



FlexWrap 60 Tape 564188

Product data	Value	Designation
Width	60	mm
Length in mm	10000	mm

Properties	Method	Unit	Value
------------	--------	------	-------

